




PRODUCT SPECIFICATIONS

# 43" 7000XT Series



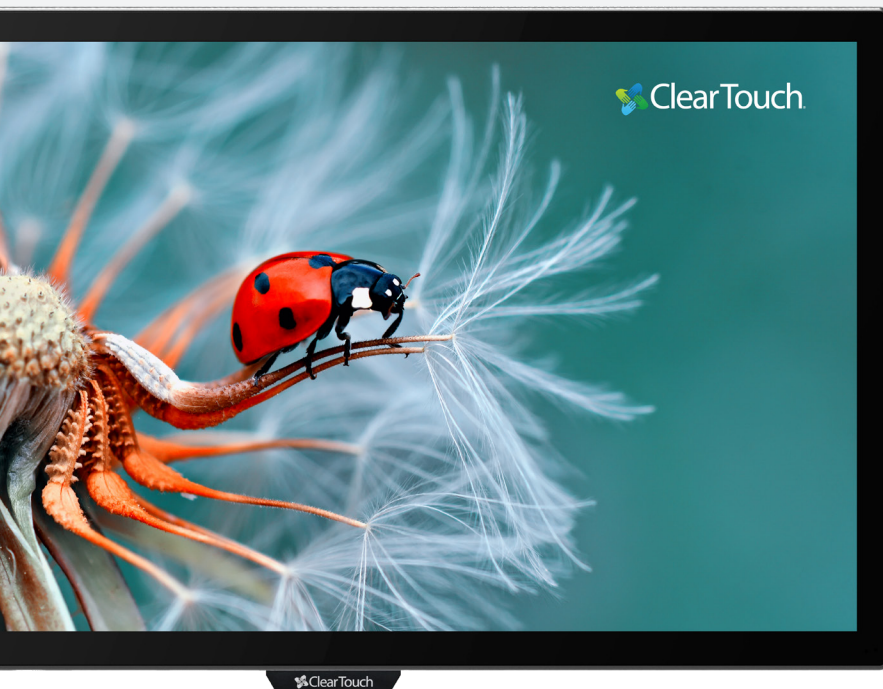






## 43" Panel Specifications

Size	43"
Panel Type	ADS
Aspect Ratio	16:9
Display Area	37.05" x 20.84"
Resolution	3840(H) x 2160(V)
Pixel Pitch	0.2451 mm x 0.2451 mm
Back Light Unit	ELED
Response Time	8 ms
Refreshing Frequency	60Hz
Display Color	1.07B (10 bit)
Brightness	450 cd/m <sup>2</sup>
Contrast Ratio	1200:1
Viewing Angle	178°
Life Time	≥ 50,000 Hours

## 7000XT SERIES INTERACTIVE PANELS

The all-new 7000XT Series with PCAP technology for superior multi-touch control.



- 
**4K VIEWING EXPERIENCE**
- 
**BUILT FOR THE MINI-CONVERTIBLE STAND**
- 
**INTUITIVE TOUCH EXPERIENCE**
- 
**COLLABORATION SOFTWARE WITHOUT SUBSCRIPTION**
- 
**INTEGRATED DEVICE CASTING**
- 
**PANEL MANAGEMENT WITH VIDEO BROADCAST**
- 
**INTEGRATED MESSAGING AND ALERT NOTIFICATIONS**

PANEL AUDIO	
Sound Channel	2.0
Output Power	2 x 10W
PANEL CONNECTIONS	
HDMI Input	3
HDMI Output	1
USB 2.0	3
USB 3.0	2
USB Type-C Input	1
Touch 2.0	2
Audio Output	1
SPDIF	1
RS232	1
RJ45 Input	1
RJ45 Output	1
PANEL INTERACTIVITY	
Sensing Type	Capacitive touch recognition
Compatibility	Windows11/Windows10/Linux/ MacOSX/Android/Chrome
Touch Point	32 points of touch - Android 40 points of touch - Windows
Minimum Object Size	3mm (Active Pen) 8mm (Passive Pen)
Touch Tool	Finger, Capacitive stylus
Response Time	8 ms
Accuracy	±1 mm (Active Pen) ±2 mm (Passive Pen)
Palm Rejection	Support
Pressure Sensitivity	4096 level
Simultaneous Writing	Double writing and double pens
Glass Type	4mm Toughened glass with Level 9 of Mohs standard
PANEL OPERATING SYSTEM	
System Version	Android 11.0
CPU	A53x4 + A73x4
GPU	Mali G52 MP8
RAM	4GB
ROM	32GB
PANEL AMBIENT	
Operation Temperature	32°F – 104°F
Operation Humidity	10% – 90%
Storage Temperature	-4°F – 140°F
Storage Humidity	10% – 90%
Altitude	Below 16000 ft

The internal frame & LED technology of the 7000XT series panel are built to withstand drafting or tabletop mode while mounted on the convertible stand.

POWER	
Power Requirements	100-240V ~ 50/60Hz 3.0A
Standby Power	≤0.5W
Standard Power	78W
Max Power (W/PC)	265W

PHYSICAL SPECIFICATION	
Key Location & Number	Right side physical key
Dimension L*H*D*	39.57" x 23.62" x 2.83"
Dimension (package) L*W*H	44.05" x 7.36" x 28.23"
Net Weight	57.65 lbs
Gross Weight	67.24 lbs
Machine + Wall Mount Thickness	3.78" WIB4722A
Wall-hanging Screw Spec	M8 x 25 mm
VESA	400 x 300 mm

WIFI MODULE (INCLUDED)	
Bluetooth 5.0, WiFi Standard: 802.11 a/b/g/n/ac/ax, no antennas	

ACCESSORIES	
American Standard Power Cord (10ft), USB touch cable (15ft, Type A-B), HDMI (v1.4; 10ft), USB Type C cable (5ft) Wall Mount, Remote Control, 2x AAA batteries, 2x passive writing pens, Quick Start Guide	

PC MODULE (OPTIONAL)	
Type	Detachable PC module
Model	CTI-PCOPS-PC15
CPU	Intel® Core™ i5 10400T CPU
RAM	DDR4 16GB
SSD	NVMe 256GB
Graphics	Integrated Intel® HD UHD Graphics 630
Chipset	Intel® Comet Lake; H510
Sound Card	Integrated High Definition Audio Stereo
Networking	10/100/1000MB
WiFi Version	802.11ax
WiFi Frequency	2.4GHz/5GHz
WiFi Working Distance	0 ~ 150 ft   0 ~ 300 ft
Bluetooth Version	Bluetooth 2.1; 3.0; 4.0; 5.0
Bluetooth Working Frequency	2.4GHz
Bluetooth Working Distance	0 ~ 32 ft
Operating System	Not included
USB 3.0	2
LAN(RJ45)	1
USB 3.1 Type C	1
Earphone Output	1
Microphone Input	1
Display Port Output	1

PANEL WARRANTY OPTIONS	
Standard	3 years
Purchase	5 years