




PRODUCT SPECIFICATIONS

# 65" 7000XT Series

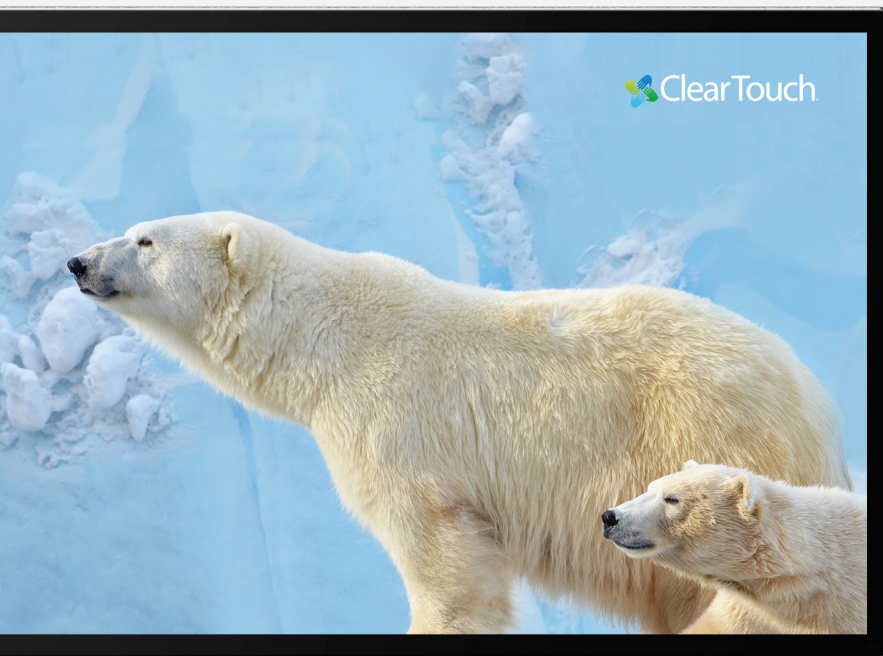

## 65" Panel Specifications

Size	65"
Panel Type	VA
Aspect Ratio	16:9
Display Area	56.23" x 31.63"
Resolution	3840(H) x 2160(V)
Pixel Pitch	0.372 mm x 0.372 mm
Back Light Unit	DLED
Response Time	6.5 ms
Refreshing Frequency	60Hz
Display Color	1.07B (10 bit)
Brightness	450 cd/m <sup>2</sup>
Contrast Ratio	5000:1
Viewing Angle	178°
Life Time	≥ 50,000 Hours

## 7000XT SERIES INTERACTIVE PANELS

The all-new 7000XT Series with PCAP technology for superior multi-touch control.



4K VIEWING EXPERIENCE



BUILT FOR THE CONVERTIBLE STAND



INTUITIVE TOUCH EXPERIENCE



COLLABORATION SOFTWARE WITHOUT SUBSCRIPTION



INTEGRATED DEVICE CASTING



PANEL MANAGEMENT WITH VIDEO BROADCAST



INTEGRATED MESSAGING AND ALERT NOTIFICATIONS

PANEL AUDIO	
Sound Channel	2.0
Output Power	2 x 16W
PANEL CONNECTIONS	
HDMI Input	3
HDMI Output	1
USB 2.0	3
USB 3.0	2
USB Type-C Input	1
Touch 2.0	2
Audio Output	1
SPDIF	1
RS232	1
RJ45 Input	1
RJ45 Output	1
PANEL INTERACTIVITY	
Sensing Type	Capacitive touch recognition
Compatibility	Windows11/Windows10/Linux/MacOSX/Android/Chrome
Touch Point	32 points of touch - Android 40 points of touch - Windows
Minimum Object Size	3mm (Active Pen) 8mm (Passive Pen)
Touch Tool	Finger, Capacitive stylus
Response Time	6.5 ms
Accuracy	±1 mm (Active Pen) ±2 mm (Passive Pen)
Palm Rejection	Support
Pressure Sensitivity	4096 level
Simultaneous Writing	Double writing and double pens
Glass Type	3mm Toughened glass with Level 9 of Mohs standard
PANEL OPERATING SYSTEM	
System Version	Android 11.0
CPU	A53x4 + A73x4
GPU	Mali G52 MP8
RAM	4GB
ROM	32GB
PANEL AMBIENT	
Operation Temperature	32°F – 104°F
Operation Humidity	10% – 90%
Storage Temperature	-4°F – 140°F
Storage Humidity	10% – 90%
Altitude	Below 16000 ft

The internal frame & LED technology of the 7000XT series panel are built to withstand drafting or tabletop mode while mounted on the convertible stand.

POWER	
Power Requirements	100-240V ~ 50/60Hz 4.0A
Standby Power	≤0.5W
Standard Power	195W
Max Power (W/PC)	365W

PHYSICAL SPECIFICATION	
Key Location & Number	Right side physical key
Dimension L*H*D*	58.78" x 34.37" x 3.15"
Dimension (package) L*W*H	63.46" x 8.66" x 40.35"
Net Weight	91.05 lbs
Gross Weight	113.65 lbs
Machine + Wall Mount Thickness	4.96" WIB9060F
Wall-hanging Screw Spec	M8 x 25 mm
VESA	600 x 400 mm

WIFI MODULE (INCLUDED)	
Bluetooth 5.0, WiFi Standard: 802.11 a/b/g/n/ac/ax, no antennas	

ACCESSORIES	
American Standard Power Cord (10ft), USB touch cable (15ft, Type A-B), HDMI (v1.4; 10ft), USB Type C cable (5ft) Wall Mount, Remote Control, 2x AAA batteries, 2x passive writing pens, Quick Start Guide	

PC MODULE (OPTIONAL)	
Type	Detachable PC module
Model	CTI-PCOPS-PC15
CPU	Intel® Core™ i5 10400T CPU
RAM	DDR4 16GB
SSD	NVMe 256GB
Graphics	Integrated Intel® HD UHD Graphics 630
Chipset	Intel® Comet Lake; H510
Sound Card	Integrated High Definition Audio Stereo
Networking	10/100/1000MB
WiFi Version	802.11ax
WiFi Frequency	2.4GHz/5GHz
WiFi Working Distance	0 ~ 150 ft   0 ~ 300 ft
Bluetooth Version	Bluetooth 2.1; 3.0; 4.0; 5.0
Bluetooth Working Frequency	2.4GHz
Bluetooth Working Distance	0 ~ 32 ft
Operating System	Not included
USB 3.0	2
LAN(RJ45)	1
USB 3.1 Type C	1
Earphone Output	1
Microphone Input	1
Display Port Output	1

PANEL WARRANTY OPTIONS	
Standard	3 years
Purchase	5 years